


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1S R3W
1/4
SEC 21 — *SEC 22*

U.S.B.&M.

L-13

<i>LINE</i>	<i>BEARING</i>	<i>DISTANCE</i>
<i>L1</i>	<i>S 45°10'29" W</i>	<i>46.87'</i>
<i>L2</i>	<i>S 84°54'58" E</i>	<i>32.84'</i>
<i>L3</i>	<i>S 49°27'28" E</i>	<i>47.83'</i>
<i>L4</i>	<i>S 44°45'31" E</i>	<i>46.35'</i>
<i>L5</i>	<i>S 14°04'59" W</i>	<i>67.63'</i>
<i>L6</i>	<i>S 25°58'01" W</i>	<i>36.97'</i>

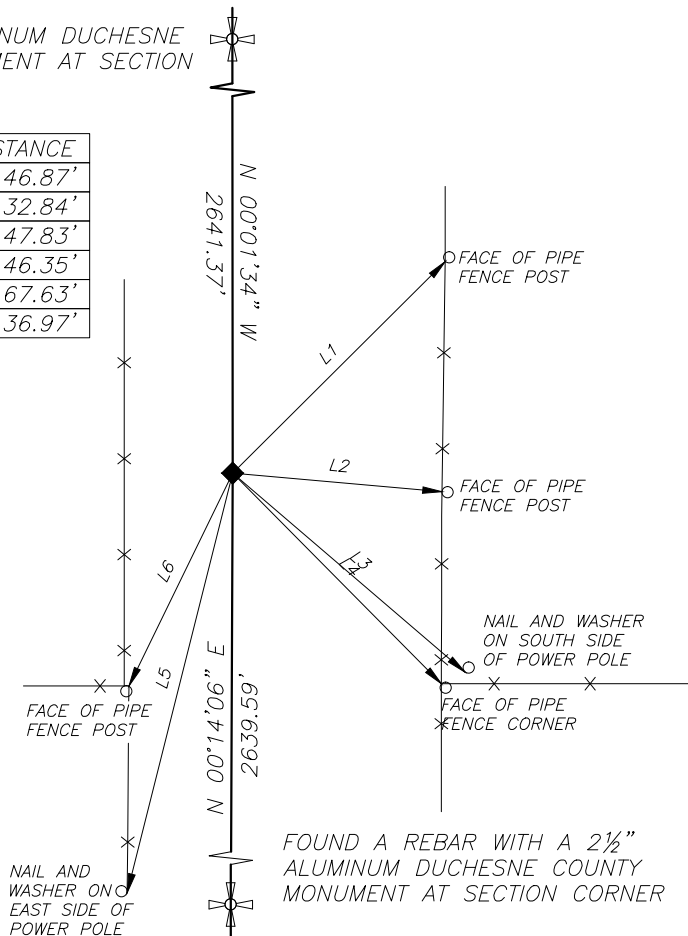

NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S.
OBSERVATIONS AT A CONTROL POINT
(SECTION CORNER) LOCATED AT LAT.
40°21'33.88695"N AND LONG.
110°13'06.20894"W USING THE UTAH
STATE G.P.S. VIRTUAL REFERENCE
STATION CONTROL NETWORK
MAINTAINED AND OPERATED BY THE
AUTOMATED GEOGRAPHIC REFERENCE
CENTER

SCALE: 1"=30'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A MAG SPIKE AT THE
POSITION OF THE 1/4 CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET A 5/8"x24" REBAR WITH A 2 1/2"
ALUMINUM DUCHESNE COUNTY MONUMENT
AT THE POSITION OF THE 1/4 CORNER
AFTER ROAD CONSTRUCTION



STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7310124.104
E: 1997453.606
NAVD88 EL: 6255.89'

LATITUDE: 40°22'52.15237" N
LONGITUDE: 110°13'06.02684" W
ELLIPSOID HEIGHT: 6202.47'
(GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300010S0030W0_400340



CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

*Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor*

